

PRODUCT BULLETIN


DOCUMENT NUMBER: 701571-000310

SUBJECT: SPRING 2021 HOTFIX 01 – WBFM

DATE: APRIL 26, 2021

This product bulletin is to inform all our dealers and customers about the Recon Wireless Blockage and Flow Monitor software used for the Spring 2021 planting season. This is a hotfix release to address a couple of immediate concerns.

Affected Parts

Part Name	Part Number	Image
Recon Blockage Monitor iPad Application	2.13.151	


About

Intelligent Ag is releasing an update to our Recon Blockage Monitor iPad application. The new application version is **2.13.151**. This release will occur on or before **Wednesday April 28th, 2021**. With this release, we have made the following improvements.

- Corrected the Mass Flow value frame. Values will now show appropriately up to 5 digits.
- Added the ability to change the gateway WIFI channel through the application.
- Added the ability to connect with "IASNetwork3" and "IASNetwork4" SSIDs.

Mass flow frame correction

Shown below is a snapshot of the operating screen. The Mass Flow value, highlighted in the image, will now display correct when the value becomes greater than 1000.

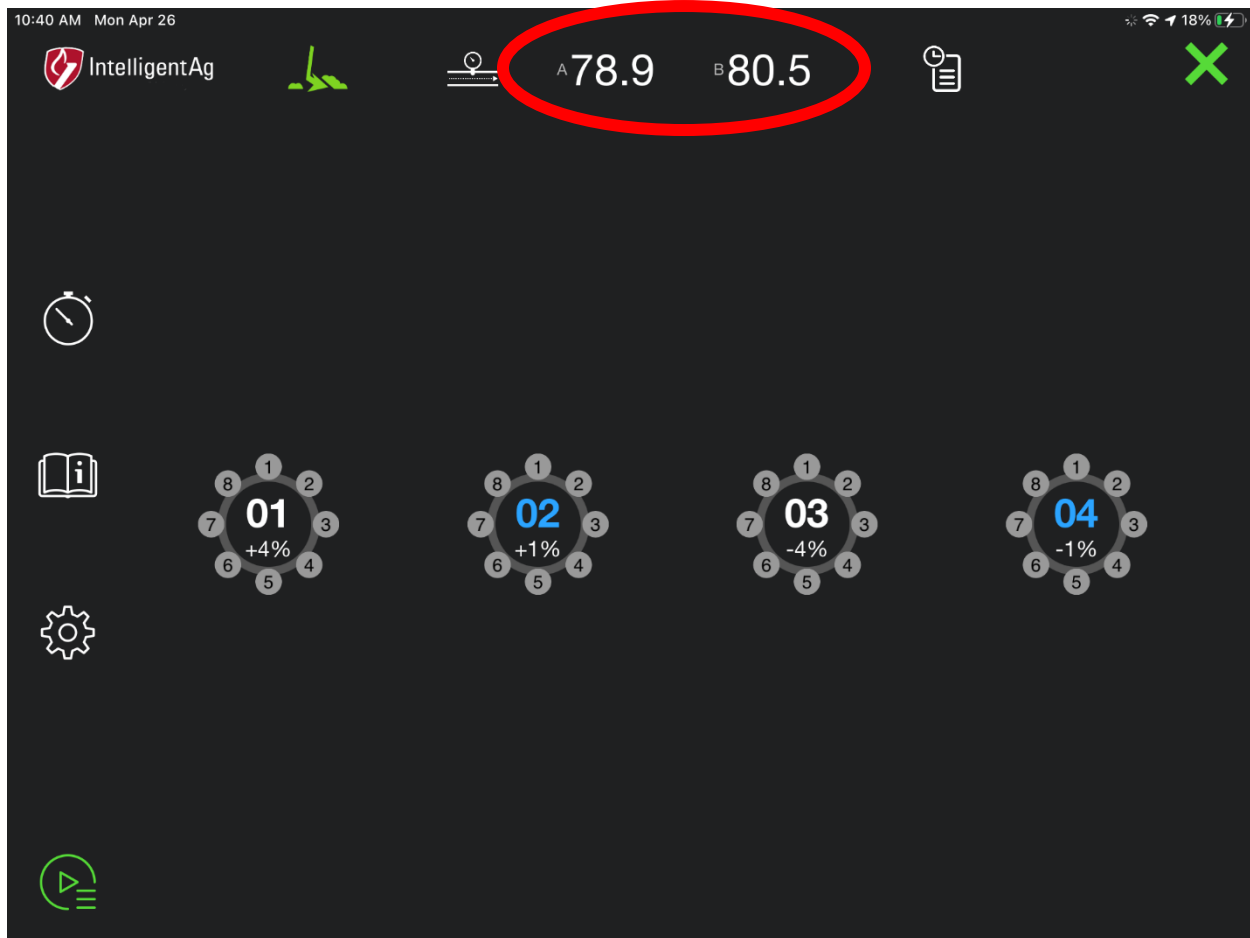



Gateway Wifi Channel Change feature

The application now has the ability to modify the WiFi channel used by the Gateway. This feature can be found under “App & Device Versions”. Shown below is the new feature option. Selecting the drop-down menu allows the channel to be changed to (1), (6), and (11). This is shown in the second image.

*****PLEASE NOTE, THE GATEWAY MUST BE POWER CYCLED FOR THIS CHANGE TO TAKE AFFECT. THERE IS NOT A PROMPT INCORPORATED INTO THIS HOTFIX. *****


After selecting the desired channel, please exit settings back to the operating screen, close the application, and then power cycle the gateway. Upon reconnecting, the new WiFi channel will be functional.

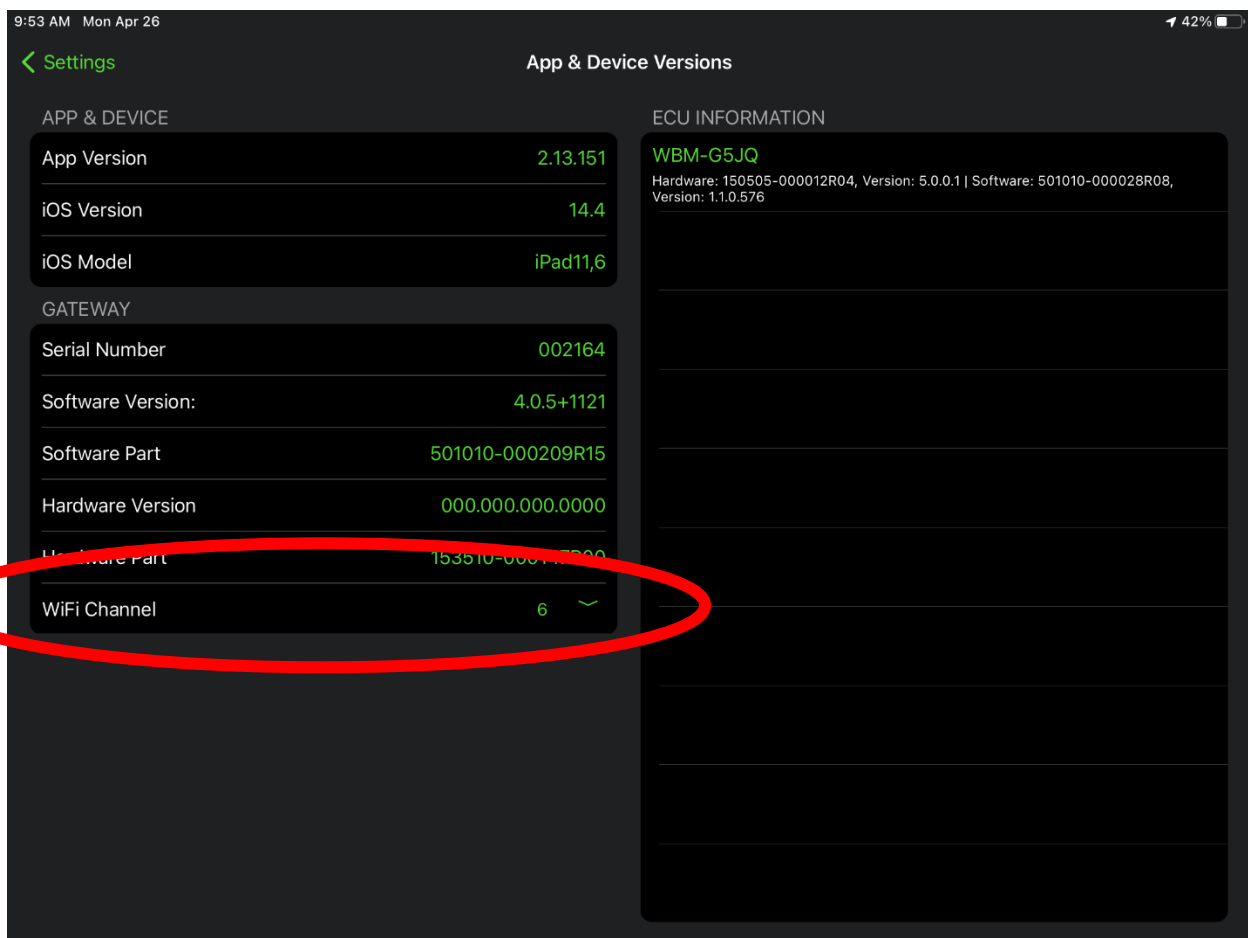

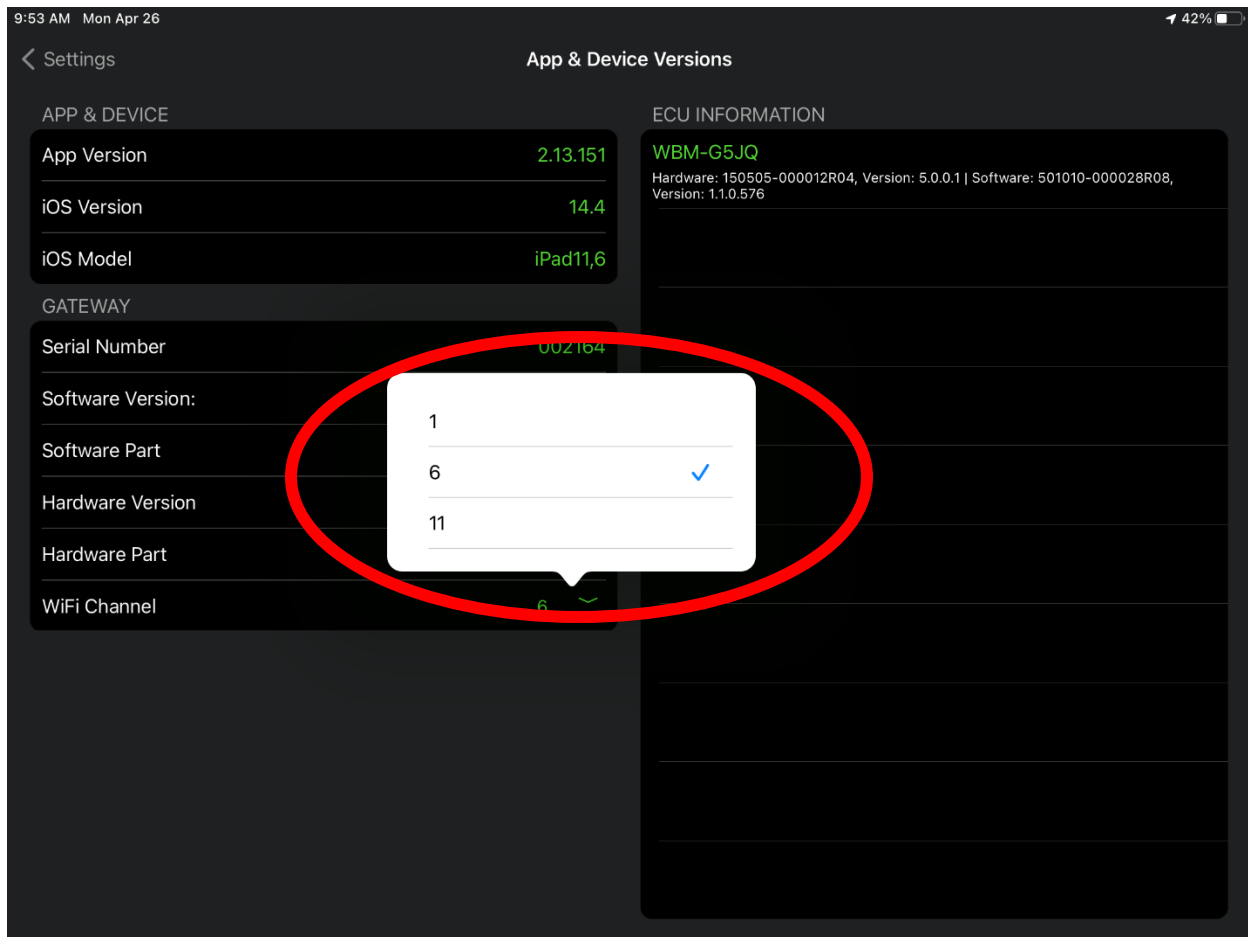

Compatibility with IASNetwork3 and IASNetwork4

The Recon Wireless Blockage and Flow Monitor application is now compatible with IASNetwork3 and IASNetwork4 SSID configurations. This can be seen on the primary loading screen.

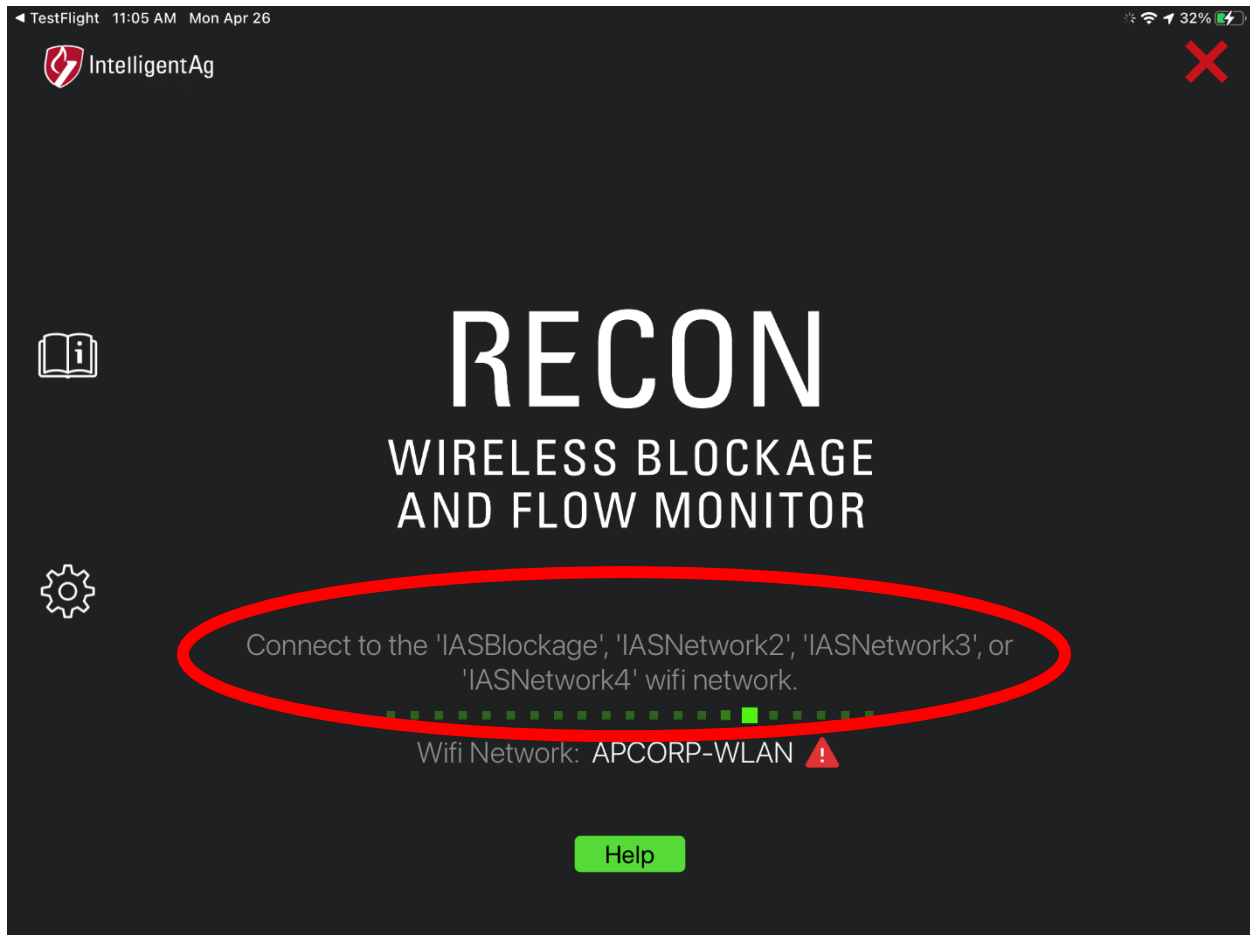



1810 NDSU Research Circle N
Fargo, ND 58102
www.intelligentag.com

Contact

Questions? Contact Intelligent Ag Product Support

Canadian Product Support: 1-306-993-1156

United States Product Support: 1-701-436-1219

Or email us at support@intelligentag.com